


National Guard  
Stout Field

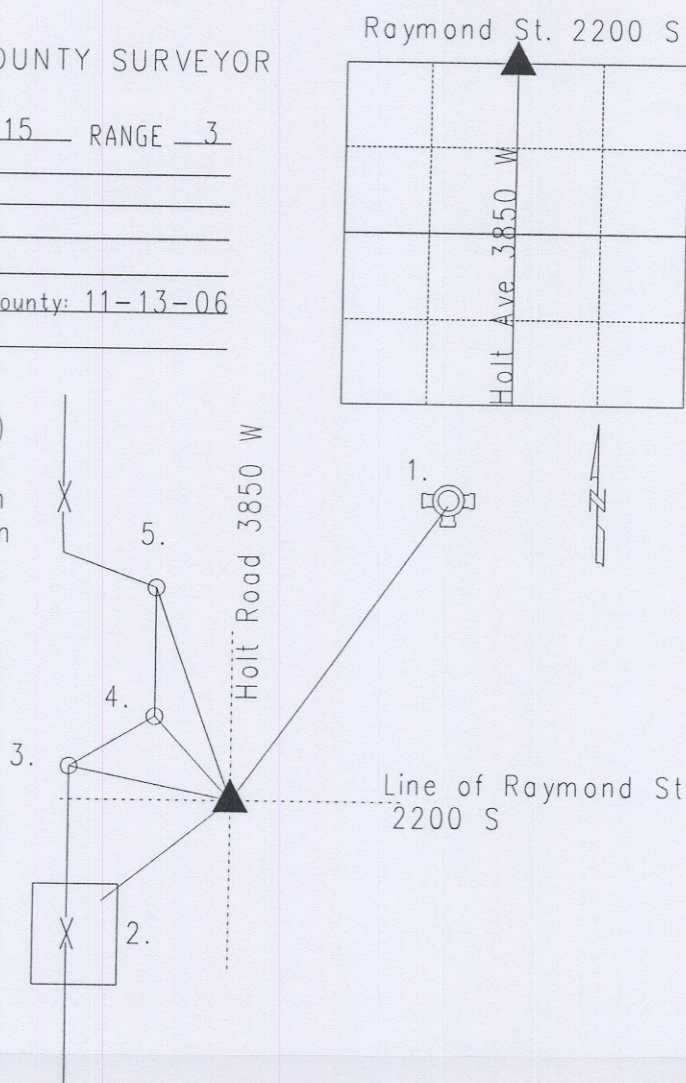

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 8" thorn bearing north 2 degrees, thence east 17 links; and a 12" ash bearing south 12 degrees, thence east 24 links. (M.C. Atlas p. 6) A survey by D.H. Hasbrook on October 29, 1883 indicates no stone or witnesses. (Wayne Legal Book P. 53) Corner referenced by Woerner on 8/18/48 and called a iron pin. Corner referenced by Unversaw on 2/16/55 and called a iron pin. Corner referenced by Schmidt on 9/20/61 and called a iron pin. Corner referenced by MSE on 7/14/78 and called a brass plug in box. Corner referenced by Greene on 12/5/86 and called a brass plug. Corner referenced by Wilcoxon on 10/7/96 and called a pk nail over brass plug. Corner referenced by Wilcoxon on 6/19/01 and called a pk nail over brass plug. Corner excavated by Wilcoxon on 8/11/08 and a brass plug was found 15" down. A 1" iron pin was found 15" down. A #205 cast iron Harrison Monument was on top of the steel pin as the corner.

15032002		
REF.	DISTANCE	DESCRIPTION
1.	88.49'	Top nut of fire hydrant
2.	43.38'	Cut 'x' in NE corner of 6'x6' concrete slab
3.	27.70'	Face of steel fence post : National Guard Stout Field
4.	27.40'	"
5.	99.80'	"